


## 2- Line, Uni-directional, Transient Voltage Suppressor

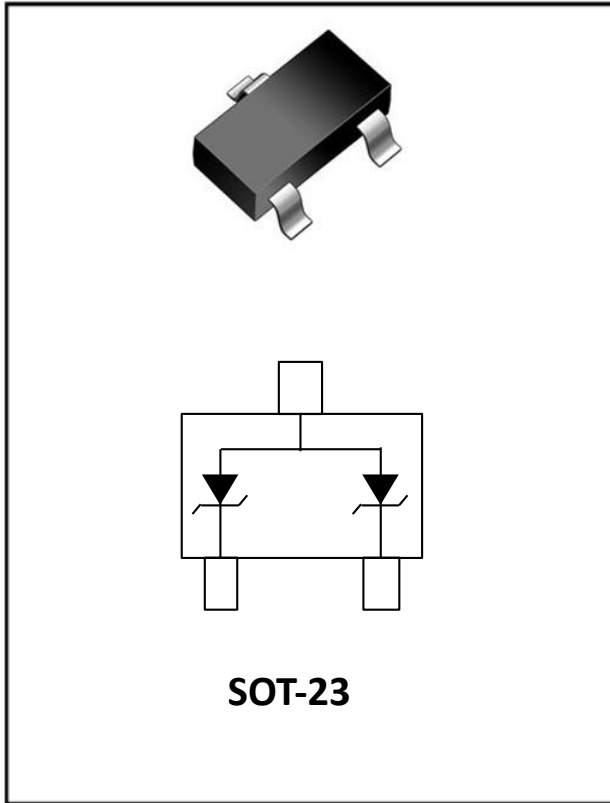

### Features


- 700W peak pulse power (8/20 $\mu$ s)
- Operating voltage: 15V
- Protects two un-directional lines
- Transient protection for each line according to IEC61000-4-2(ESD):  $\pm 30$ kV contact,  $\pm 30$ kV air IEC61000-4-5:20A( $t_p=8/20\mu$ s)
- Low leakage current
- Ultra low clamping voltage
- RoHS Compliant

### Applications


- Switches / Buttons
- Test Equipment/Instrumentation
- Point-of-Sale Terminals
- Medical Equipment
- Notebooks / Desktops / Servers
- Computer Peripherals

### Mechanical Data

- Package: SOT-23
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below



### Definitions of electrical characteristics

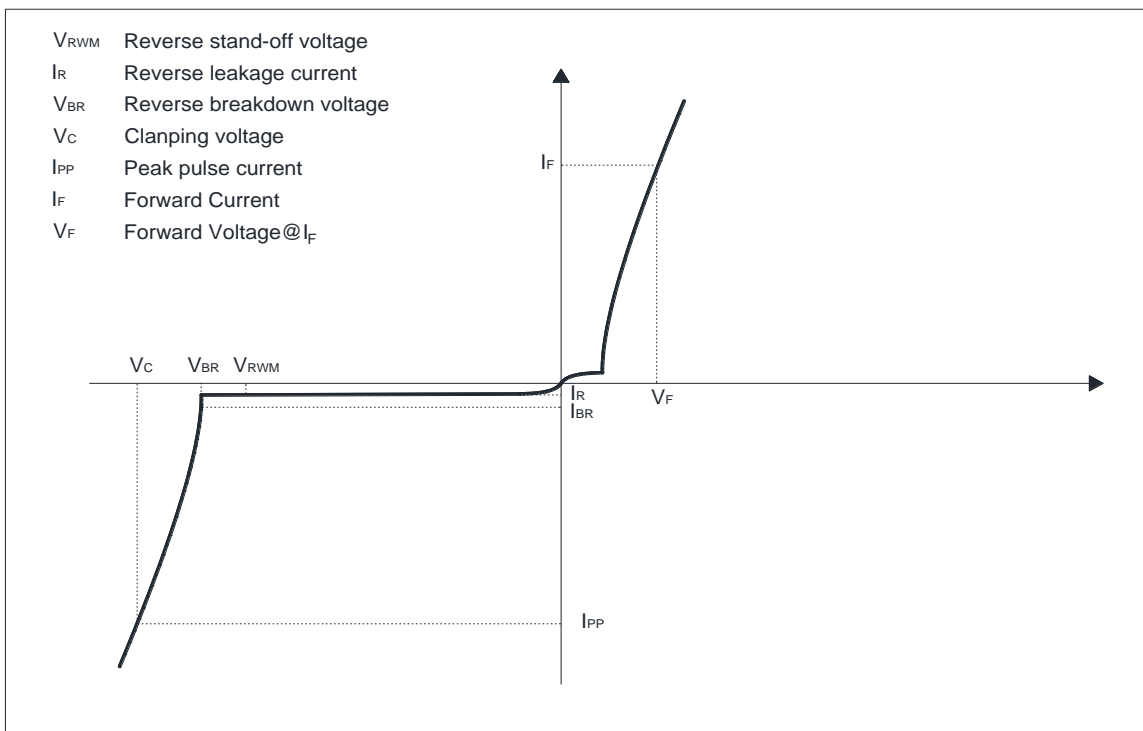



# ESD1512E

## ■Maximum Ratings

| PARAMETER                                       | SYMBOL    | LIMITS   | UNIT        |
|---|-----------|----------|-------------|
| Peak pulse power ( $t_p = 8/20\mu s$ )          | $P_{pk}$  | 700      | W           |
| Peak pulse current ( $t_p = 8/20\mu s$ )        | $I_{pp}$  | 20       | A           |
| ESD according to IEC61000-4-2 air discharge     | $V_{ESD}$ | $\pm 30$ | KV          |
| ESD according to IEC61000-4-2 contact discharge |           | $\pm 30$ |             |
| Junction temperature                            | $T_J$     | -55~125  | $^{\circ}C$ |
| Storage temperature                             | $T_{STG}$ | -55~150  | $^{\circ}C$ |

Notes:

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.

## ■Electrical Characteristics ( $T_J=25^{\circ}C$ )

| PARAMETER                       | Symbol    | UNIT    | Conditions   | Min  | Typ | Max |
|---------------------------------|-----------|---------|--|------|-----|-----|
| Reverse maximum working voltage | $V_{RWM}$ | V       |  |      |     | 15  |
| Reverse leakage current         | $I_R$     | $\mu A$ | $V_{RWM} = 15V$  |      |     | 0.2 |
| Reverse breakdown voltage       | $V_{BR}$  | V       | $I_T = 1mA$  | 16.7 |     |     |
| Forward Voltage                 | $V_F$     | V       | $I_F = 10mA$   |      | 0.8 | 1.2 |
| Clamping voltage                | $V_C$     | V       | $I_{PP} = 1A, t_p = 8/20\mu s$                           |      |     | 22  |
|                                 |           |         | $I_{PP} = 20A, t_p = 8/20\mu s$                          |      |     | 35  |
| Junction capacitance            | $C_J$     | pF      | $V_R = 0V, f = 1MHz, Pin1$ to $Pin2$                     |      | 90  |     |
| Junction capacitance            | $C_J$     | pF      | $V_R = 0V, f = 1MHz, Pin2$ to $Pin3$ or $Pin1$ to $Pin3$ |      | 43  |     |

## ■Ordering Information (Example)

| PREFERRED P/N | PACKING CODE | UNIT WEIGHT(mg) | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|---------------|--------------|-----------------|----------------------|-------------------------|----------------------------|---------------|
| ESD1512E      | F2           | Approximate 10  | 3000                 | 30000                   | 120000                     | 7 reel        |



## ■ Characteristics (Typical)

Fig.1 8/20us Waveform Per IEC6100-4-5

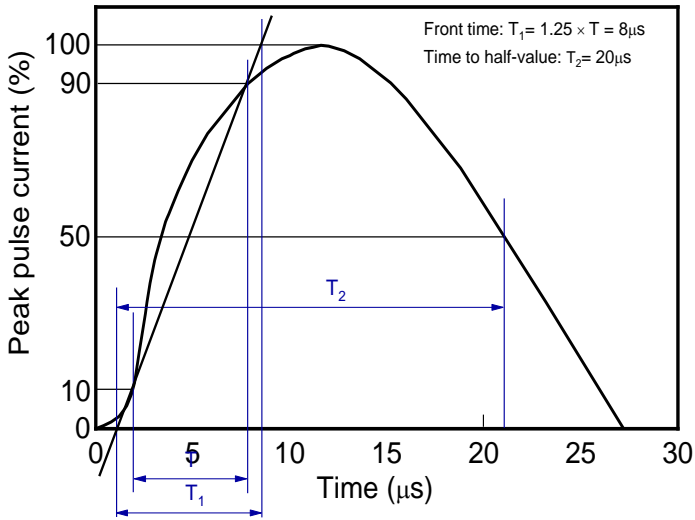


Fig.3 Clamping voltage vs. Peak pulse current

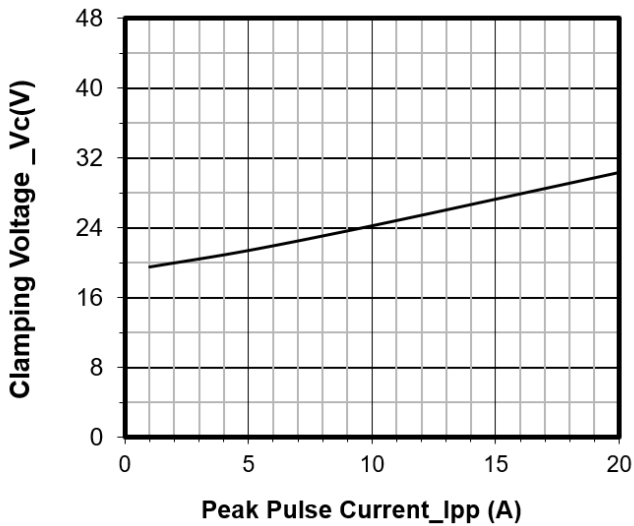


Fig.5 Non-repetitive peak pulse power vs. Pulse time

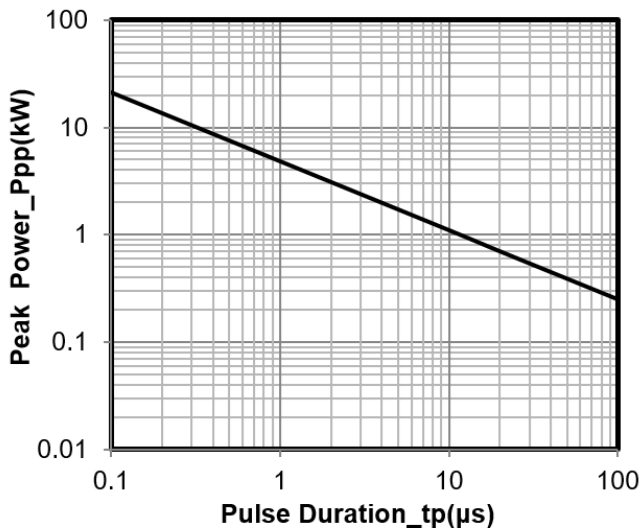


Fig.2 Contact Discharge Current Waveform per IEC61000-4-2

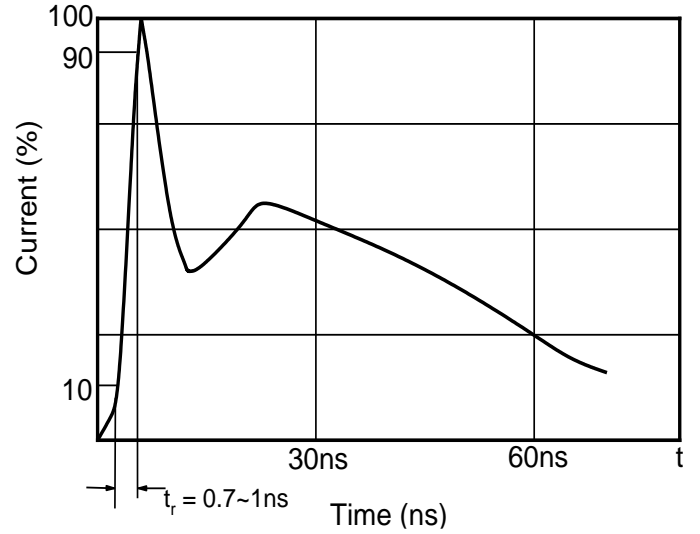


Fig.4 Capacitance vs. Reverse voltage



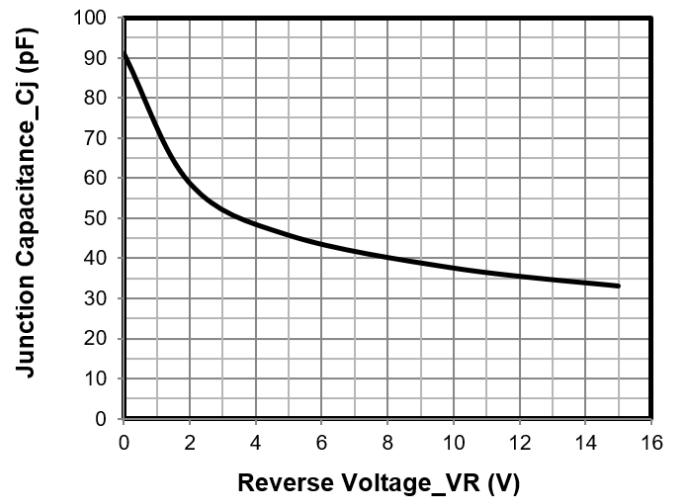






Fig.6 Power derating vs. Ambient temperature

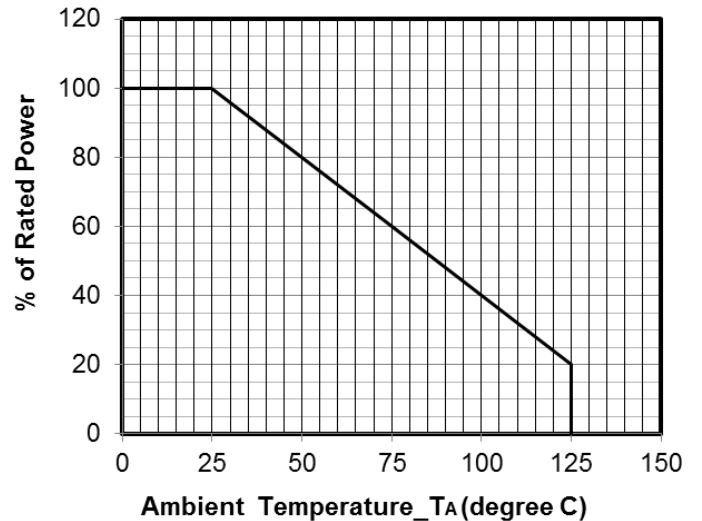

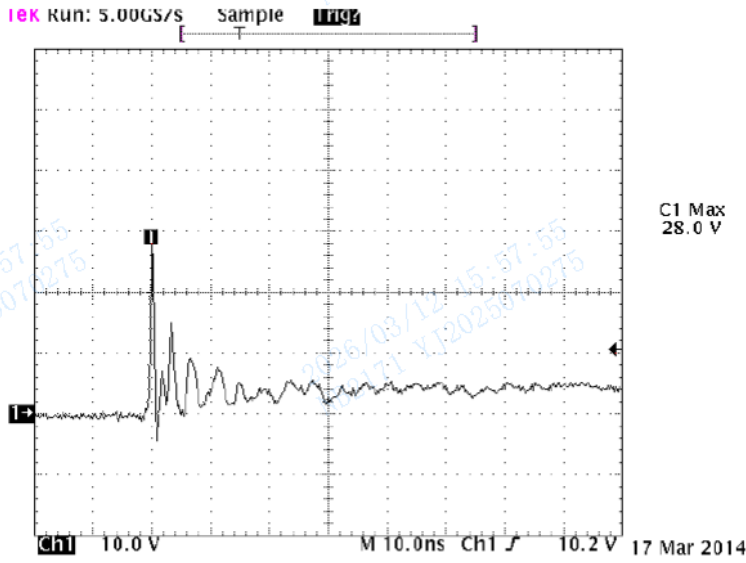

**Note: Data is taken with a 10x attenuator**

## ■ Outline Dimensions



UNIT: mm

| SYMBOL | DIMENSIONS |       |            |       |
|--------|------------|-------|------------|-------|
|        | INCHES     |       | Millimeter |       |
|        | MIN.       | MAX.  | MIN.       | MAX.  |
| A      | 0.035      | 0.045 | 0.900      | 1.150 |
| A1     | 0.000      | 0.004 | 0.000      | 0.100 |
| A2     | 0.035      | 0.041 | 0.900      | 1.050 |
| b      | 0.012      | 0.020 | 0.300      | 0.500 |
| c      | 0.004      | 0.008 | 0.100      | 0.200 |
| D      | 0.110      | 0.118 | 2.800      | 3.000 |
| E      | 0.047      | 0.055 | 1.200      | 1.400 |
| E1     | 0.089      | 0.100 | 2.250      | 2.550 |
| e      | 0.037TYP   |       | 0.950TYP   |       |
| e1     | 0.071      | 0.079 | 1.800      | 2.000 |
| L      | 0.022REF   |       | 0.550REF   |       |
| L1     | 0.012      | 0.020 | 0.300      | 0.500 |
| θ      | 0°         | 8°    | 0°         | 8°    |

NOTE:  
 1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.  
 2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.  
 3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.